

FEKABOX 100

AUTOMATIC STATIONS FOR COLLECTING AND LIFTING WASTE WATER



Automatic system for collecting, lifting and pumping black water and domestic waste from basements located under the level of the drains into sewers. FEKABOX 100 comprises a high density polyethylene tank with an effective capacity of 100 litres, with a sturdy gas and liquid proof cover. Fitted for operation with one automatic electric pump type FEKA 600/700/800 to be ordered separately. Complete with: tank inlet DN50 - DN100 (male/female), tank outlet DN50 - 2"


GAS (vertical or horizontal). Complete with discharge plug DN40 and equipped with an anti-flotation system (EN 12050-1 standard).

Operating range: from 1 a to 24 m³/h with a head of up to 9 m.

Liquid temperature range: +50°C

Pumped liquid: phreatic water, rain water, clear waste water, black waste water and water from rivers and lakes.

HYDRAULIC DATA

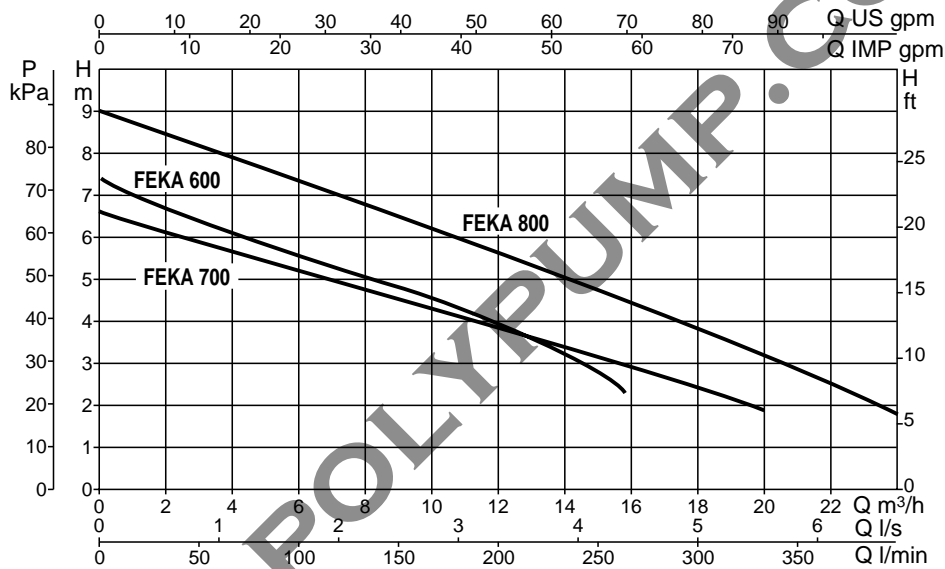

DIMENSIONS AND WEIGHTS

Weight without pump: 25 kg

