

# FEKABOX 200

## AUTOMATIC STATIONS FOR COLLECTING AND LIFTING WASTE WATER



Automatic collection and lifting stations, used for collecting and pumping civil and industrial waste water in sewers.

Comprises a high density 200 litre polythene tank with removable cover complete with a watertight and gastight seal.

Fitted for one automatic electric pump (**FEKA 600 M-A - FEKA 700 M-A - FEKA 800 M-A**) to be ordered separately.

Complete with: special cable holder, DN50 and DN110 suction manifolds and 2"


delivery manifolds. Complete with connector for DN50 vent tube. An alarm float can be used on request.

**Operating range:** from 1 to 24 m<sup>3</sup>/h with a head of up to 9 m

**Liquid temperature range:** +50°C

**Pumped liquid:** ground water, rain water, clear waste water, black waste water and water from rivers and lakes.

### HYDRAULIC DATA

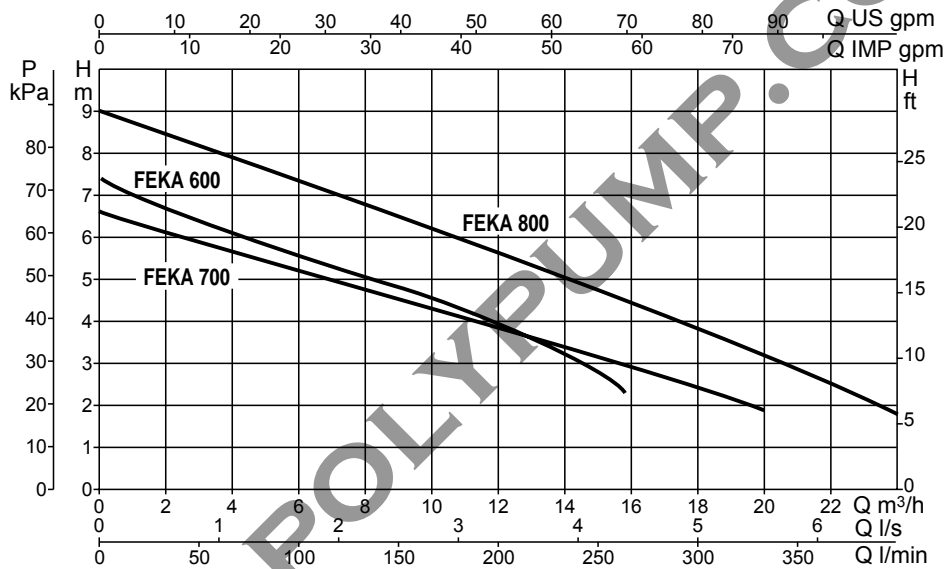

### DIMENSIONS AND WEIGHTS

Weight without pump: 25 kg

