

FEKABOX 280

AUTOMATIC STATIONS FOR COLLECTING AND LIFTING WASTE WATER



Automatic collection and lifting stations, used for collecting and pumping civil and industrial waste water in sewers.

Comprises a high density 280 litre polythene tank with removable cover complete with a watertight and gastight seal. Complete with lifting device (DSD2) for making pump maintenance easier.

Fitted for one automatic electric pump (**FEKA 600 M-A - FEKA 700 M-A - FEKA 800 M-A**) to be ordered separately.

Complete with: special cable holder, DN50 and DN110 suction manifolds and 2" delivery manifolds.

delivery manifolds.


Complete with connector for DN50 vent tube. An alarm float can be used on request.

Operating range: from 1 to 24 m³/h with a head of up to 9 m

Liquid temperature range: +50°C

Pumped liquid: ground water, rain water, clear waste water, black waste water and water from rivers and lakes.

HYDRAULIC DATA

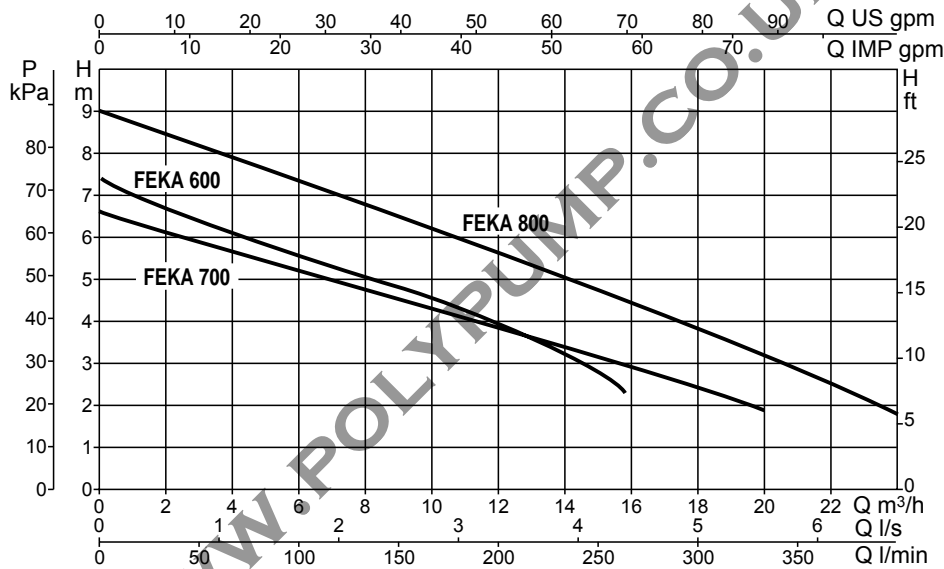

DIMENSIONS AND WEIGHTS

Weight without pump: 38 kg

