

2 PULSAR DRY WITH 2 PULSAR DRY 5''



Booster set with 2 PULSAR DRY, multistage, surface submerged pumps complete with baseplate, suction and delivery manifold in stainless steel, 2 membrane vessels and control panel supplied complete with:



Single-phase version:

- Automatic inverter for exchanging the order of pump starting at each start-up
- Main switch
- Float or pressure switch can be inserted as protection against operation without water
- Low voltage auxiliary circuit complete with transformer and fuse

Three-phase version:

- Automatic inverter for exchanging the order of pump starting at each start-up
- Accident prevention "door interlock" main switch
- Low voltage auxiliary circuit complete with transformer and fuse
- Float or pressure switch can be inserted as protection against operation without water

ELECTRICAL AND HYDRAULIC DATA

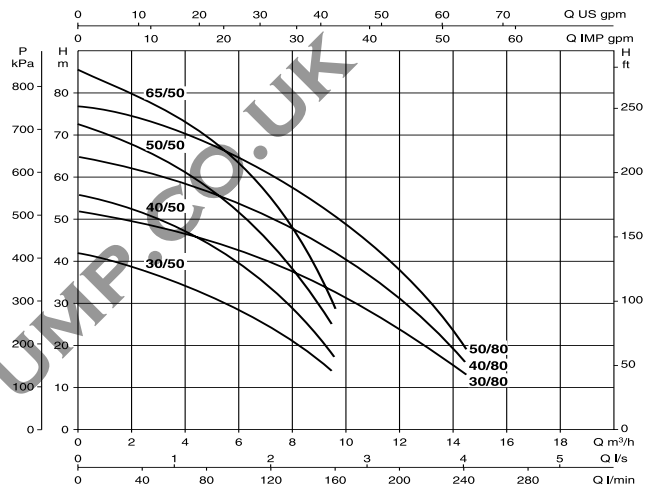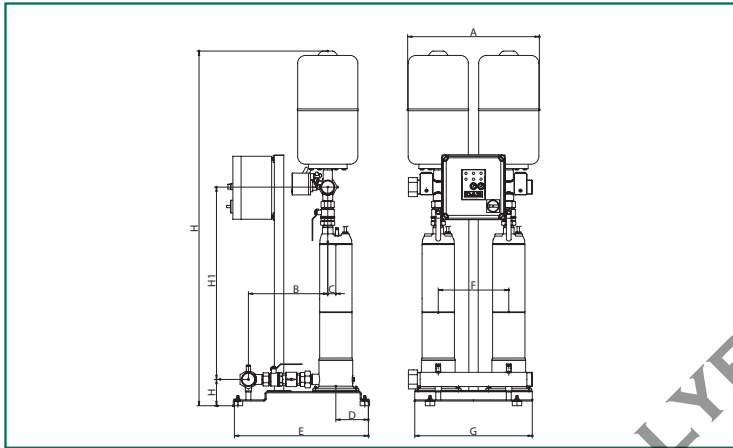

MODEL	VOLTAGE	P2 NOMINAL		In A	FLOW RATE L/h	MAX PRESSURE OBTAINABLE BAR	PRESSURE SWITCH SETTING IN BAR
	50 Hz	kW	HP				
2 PULSAR DRY 30/50 M	1x220-240 V~	2x0.55	2x0.75	2x4.4	8.200-4.400	3.8	2÷3.3
2 PULSAR DRY 40/50 M	1x220-240 V~	2x0.75	2x1	2x5.2	8.000-4.400	5	3÷4.5
2 PULSAR DRY 50/50 M	1x220-240 V~	2x1	2x1.36	2x6.5	7.600-5.000	6.5	4÷5.5
2 PULSAR DRY 65/50 M	1x220-240 V~	2x1.2	2x1.6	2x7.8	7.600-5.500	8	5÷6.5
2 PULSAR DRY 30/80 M	1x220-240 V~	2x0.75	2x1	2x5.2	11.000-7.000	4.5	2.5÷4
2 PULSAR DRY 40/80 M	1x220-240 V~	2x1	2x1.36	2x6.5	11.000-7.100	5.8	3.5÷5
2 PULSAR DRY 50/80 M	1x220-240 V~	2x1.2	2x1.6	2x7.8	11.200-8.000	7.2	4÷5.5
2 PULSAR DRY 30/50 T	3x400 V~	2x0.55	2x0.75	2x1.65	8.200-4.400	3.8	2÷3.3
2 PULSAR DRY 40/50 T	3x400 V~	2x0.75	2x1	2x1.85	8.000-4.400	5	3÷4.5
2 PULSAR DRY 50/50 T	3x400 V~	2x1	2x1.36	2x2.4	7.600-5.000	6.5	4÷5.5
2 PULSAR DRY 65/50 T	3x400 V~	2x1.2	2x1.6	2x2.9	7.600-5.500	8	5÷6.5
2 PULSAR DRY 30/80 T	3x400 V~	2x0.75	2x1	2x1.85	11.000-7.000	4.5	2.5÷4
2 PULSAR DRY 40/80 T	3x400 V~	2x1	2x1.36	2x2.4	11.000-7.100	5.8	3.5÷5
2 PULSAR DRY 50/80 T	3x400 V~	2x1.2	2x1.6	2x2.9	11.200-8.000	7.2	4÷5.5

MODEL	A	B	C	D	E	F	G	H	H1	H2	Ø MANIFOLD		WEIGHT Kg
											SUCTION	DELIVERY	
2 PULSAR DRY 30/50 M	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 40/50 M	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 50/50 M	560	338	34	139	570	300	500	1482	791	112	2"	2"	66
2 PULSAR DRY 65/50 M	560	338	34	139	570	300	500	1415	724	112	2"	2"	66
2 PULSAR DRY 30/80 M	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 40/80 M	560	338	34	139	570	300	500	1482	791	112	2"	2"	67
2 PULSAR DRY 50/80 M	560	338	34	139	570	300	500	1415	724	112	2"	2"	66
2 PULSAR DRY 30/50 T	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 40/50 T	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 50/50 T	560	338	34	139	570	300	500	1415	724	112	2"	2"	66
2 PULSAR DRY 65/50 T	560	338	34	139	570	300	500	1509	818	112	2"	2"	66
2 PULSAR DRY 30/80 T	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 40/80 T	560	338	34	139	570	300	500	1415	724	112	2"	2"	67
2 PULSAR DRY 50/80 T	560	338	34	139	570	300	500	1509	818	112	2"	2"	66